**Protect•IR®****Multispectrum IR Flame Detector****X3301**

Shown with optional Q9033B Mounting Bracket.

DESCRIPTION

The Protect•IR® Multispectrum IR Flame Detector is the future generation detector for performance and technology. The detector utilizes multi-patented* signal processing algorithms supported by an embedded 32-bit microprocessor to provide continuous protection in the presence of false alarm sources and environments with infrared radiation present. It is suitable for indoor and

outdoor applications that require the highest level of false alarm rejection and fire detection performance. The detector is available in aluminum or 316 stainless steel for installation in the harshest environments. The Protect•IR has a detection range to n-Heptane of 210 feet, and a solid cone of vision for methane. The detector features standard fire alarm, fault and auxiliary relays, with an isolated 4 to 20 mA output model available.

The X3301 provides superior performance in applications that are at the extremes, and where background infrared radiation is a normal condition:

- Hangars
- Offshore production platforms
- Offshore production ships
- Refineries
- Production facilities
- Loading racks
- Compressor stations
- Turbine enclosures
- Airport water curtains.

*X3301 technology advancements are covered under the following U.S. Patents: 5,995,008, 5,804,825 and 5,850,182.

FEATURES AND BENEFITS**Protect•ir TECHNOLOGY FEATURES**

- FM 3260 (2000).
- EN 54-10 Certified (VdS).
- ATEX Directive compliant.
- Certified performance to multiple fuel types.
- EQP models available.
- Extended detection range.
- New standard set for cone of vision.
- Maximum false alarm rejection.
- Reliable flame detection with modulated IR background.
- Microprocessor controlled heated optics.
- Calibrated automatic optical check for each sensor eliminates need for testing with external test lamp.
- RFI and EMC Directive compliant.
- Event logging with time and date stamp.
- International certifications.
- Integral wiring compartment for ease of installation.
- Solar resistance.

BENEFITS

- Single detector for multiple fuels.
- Low cost of coverage.
- Ability to detect smaller fires earlier.
- Solid cone of vision to 100 feet for methane.
- Better detection zoning capability.
- Best combination of flame detection and false alarm rejection.
- Low maintenance costs.
- Reliable fault diagnostics.
- Suitable for heavy industrial applications.
- Explosion/flame proof or increased safety installations (EEx de) in hazardous locations.
- Easily retrofitted.

SPECIFICATIONS

Operating Voltage 24 vdc. Operating range is 18 to 32 vdc.

Power Consumption 4 watts minimum (without heater), 17 watts at 32 vdc with EOL resistor installed and heater on maximum.

Relays Contacts rated 5 amperes at 30 vdc.

Fire Alarm: — Form C (NO and NC contacts)
— normally de-energized
— latching/non-latching.

Fault: — Form A (NO contacts)
— normally energized
— latching/non-latching.

Auxiliary: — Form C (NO and NC contacts)
— normally energized/de-energized
— latching/non-latching.

Current Output (Optional) 4–20 mA, with a maximum loop resistance of 500 ohms from 18–19.9 vdc, 600 ohms from 20–32 vdc.

Temperature Range Operating: –40°F to +167°F (–40°C to +75°C).
Storage: –67°F to +185°F (–55°C to +85°C).

Hazardous location ratings from –55°C to +125°C available on flameproof model.

Humidity Range 0 to 95% relative humidity, can withstand 100% condensing humidity for short periods of time.

Response Characteristics

| | Fuel | Size | Distance Ft (m) | Average Response Time (seconds) |
|-----------------------|--------------------------------------|--|-----------------|---------------------------------|
| Very High Sensitivity | n-Heptane | 1 x 1 foot (0.1 m ²) | 210 (64)* | 10 |
| | n-Heptane** | 1 x 1 foot (0.1 m ²) | 210 (64)* | 6 |
| | n-Heptane | 1 x 1 foot (0.1 m ²) | 100 (30) | 3 |
| | Diesel** | 1 x 1 foot (0.1 m ²) | 150 (46)* | 13 |
| | Methanol | 1 x 1 foot (0.1 m ²) | 150 (46)* | 18 |
| | Methanol** | 1 x 1 foot (0.1 m ²) | 150 (46)* | 7 |
| | Methane | 30 inch plume (0.8 m) | 100 (30) | 2 |
| | JP-5** | 1 x 1 foot (0.1 m ²) | 150 (46)* | 2 |
| | JP-5** | 2 x 2 foot (0.4 m ²) | 210 (64)* | 3 |
| | JP-5** | 2 x 2 foot (0.4 m ²) | 100 (30) | 2 |
| Medium Sensitivity | Office Paper 0.5 lb. | 19 x 19 x 8 inches (.05 m ³) | 100 (30) | 4 |
| | Corrugated Panel | 18 x 36 inches (0.4 m ²) | 100 (30) | 7 |
| | n-Heptane | 1 x 1 foot (0.1 m ²) | 100 (30) | 11 |
| | n-Heptane | 1 x 1 foot (0.1 m ²) | 50 (15) | 2 |
| | Diesel** | 1 x 1 foot (0.1 m ²) | 70 (21) | 4 |
| | Methanol | 1 x 1 foot (0.1 m ²) | 70 (21) | 9 |
| | Methane | 30 inch plume (0.8 m) | 65 (20) | 2.5 |
| | Methane | 30 inch plume (0.8 m) | 55 (17) | 2 |
| | JP-5** | 2 x 2 foot (0.4 m ²) | 100 (30) | 2 |
| | Office Paper 0.5 lb. | 19 x 19 x 8 inches (.05 m ³) | 50 (15) | 5 |
| Corrugated Panel | 18 x 36 inches (0.4 m ²) | 50 (15) | 1 | |

* Outdoor test condition.
** 10 second pre-burn from ignition.

Wiring 14 AWG (2.08 mm²) or 16 AWG (1.31 mm²) shielded cable is recommended.


Enclosure Material Copper-free aluminum or 316 stainless steel.

Conduit Entry Size 3/4 inch NPT or 25 mm.

Warranty 5 years.

Shipping Weight (Approximate) Aluminum: 6 pounds (2.7 kg).
Stainless Steel: 10 pounds (4.5 kg).

Field of View 90° horizontal by 75° vertical, at a minimum of 70% of the on-axis detection distance.

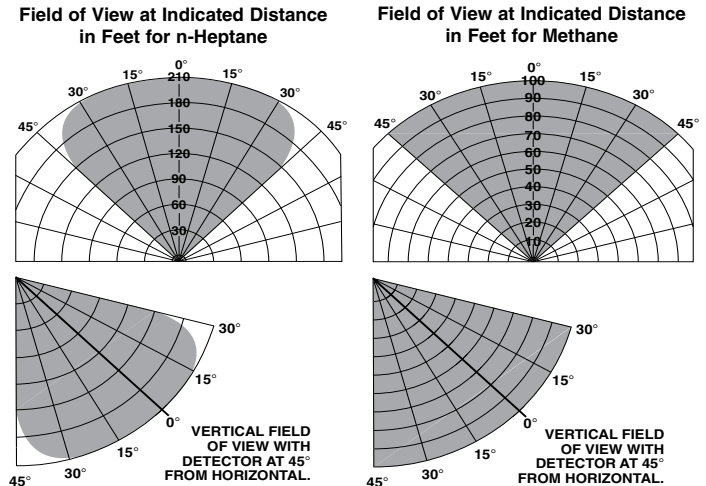

Certification



Class I, Div. 1, Groups B, C & D;
Class II, Div. 1, Groups E, F, & G;
Class I, Div. 2, Groups A, B, C & D (T3C);
Class II, Div. 2, Groups F & G (T3C);
Class III.
NEMA/Type 4X.

Increased Safety Model
0539 Ⓢ II 2 GD
EEx d IIC T5–T6
DEMKO 01 ATEX 130204
T6 (Tamb = –55°C to +60°C).
T5 (Tamb = –55°C to +75°C).
IP66.

IECEX

Certificate of Conformity
IECEX ULD 06.0017X
Ex d IIC T6 or Ex de IIC T6
T6 (Tamb = –55°C to +60°C).

Flameproof Model

0539 Ⓢ II 2 GD
EEx d IIC T4–T6
DEMKO 01 ATEX 130204
T6 (Tamb = –55°C to +60°C).
T5 (Tamb = –55°C to +75°C).
T4 (Tamb = –55°C to +125°C).
IP66.



IEC 61508: 2000

Certified SIL 2 Capable.
Applies to specific models – refer to the SIL 2 Certified X3301 manual (95-8582).



Detector Electronics Corporation

6901 West 110th Street • Minneapolis, Minnesota 55438 USA
Operator: (952) 941-5665 or (800) 765-FIRE
Customer Service: (952) 946-6491 • Fax (952) 829-8750
<http://www.det-tronics.com> • E-mail: detronics@detronics.com

Specifications subject to change without notice.