


## ROSHNI LOW PROFILE STANDARD

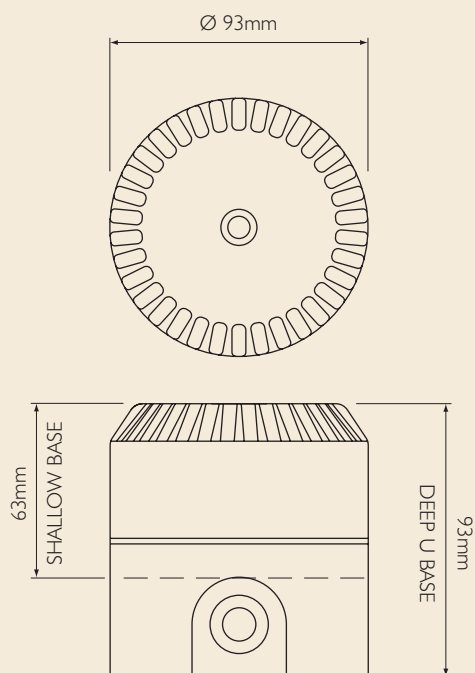

The Roshni Low Profile (RoLP) is the fire alarm markets leading conventional sounder, although it finds uses in much wider applications such as security, general signalling and process alarms. The wide operating voltage and range of tones available to the user make this flexible sounder supremely adaptable in even its most basic forms.

- HIGH SOUND OUTPUT
- LOW CURRENT CONSUMPTION
- 32 TONES (USER SELECTABLE)
- AUTOMATIC SYNCHRONISATION
- VOLUME CONTROL
- SECOND TONE FOR TWO STAGE ALARMS
- LOCKABLE BASE

## Specification

Voltage	9 - 28Vdc (*1)
Current	16mA (tone 3)
Sound output	102dB(A) (tone 3)
Tones	32
Volume control	20dB
Monitoring	Reverse polarity
Temperature	- 25°C to + 70°C
Protection	IP65
Construction	ABS
Weight	Shallow base 0.24Kg Deep & U base 0.25Kg
Colours	Red or white

(\*1) 110 to 230Vac with powered base.

**ASTEC**.B.V.

Kerkweg 70  
6155 KN Puth (NL)  
Tel.: +31 (0)46 443 55 77  
Fax: +31 (0)46 443 04 82  
E-mail: [info@astec.nl](mailto:info@astec.nl)  
Internet: [www.astec.nl](http://www.astec.nl)