


## RoLP MAXI HIGH PERFORMANCE

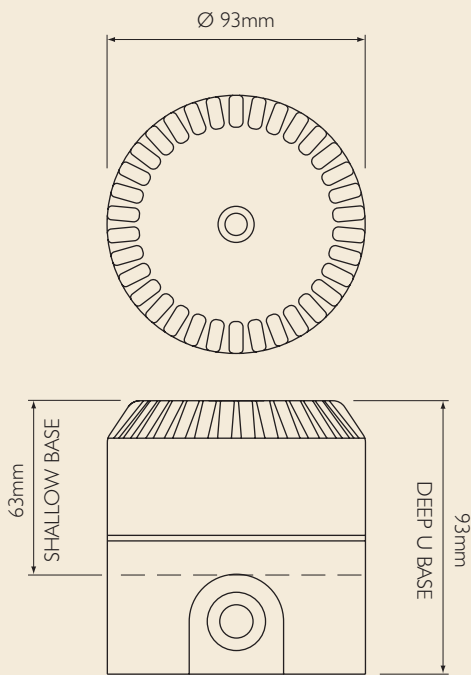

### Specification

Voltage	9 - 28Vdc (*1)
Current	30mA (tone 3)
Sound output	105dB(A) (tone 3)
Tones	32
Volume control	20dB
Monitoring	Reverse polarity
Temperature	- 25°C to + 70°C
Protection	IP65
Construction	ABS
Weight	Shallow base 0.24Kg Deep & U base 0.25Kg
Colours	Red or white

(\*1) 110 to 230Vac with powered base.

The RoLP MAXI is a higher output version of the well known market leading RoLP sounder. The adoption of new smart technology has allowed six key alarm tones to be boosted to 105dB(A), giving a more powerful fire sounder that is CPD compliant, compact and a perfect match for the standard RoLP.

- ENHANCED OUTPUT ON SIX KEY TONES
- COMPATIBLE WITH STANDARD RoLP
- 32 TONES
- AUTOMATIC SYNCHRONISATION
- VOLUME CONTROL
- SECOND TONE FOR TWO STAGE ALARMS
- LOCKABLE BASES

**ASTEC**<sub>B.V.</sub>

Kerkweg 70  
6155 KN Puth (NL)  
Tel.: +31 (0)46 443 55 77  
Fax: +31 (0)46 443 04 82  
E-mail: [info@astec.nl](mailto:info@astec.nl)  
Internet: [www.astec.nl](http://www.astec.nl)