


SYMPHONI HO IP WATER RESISTANT

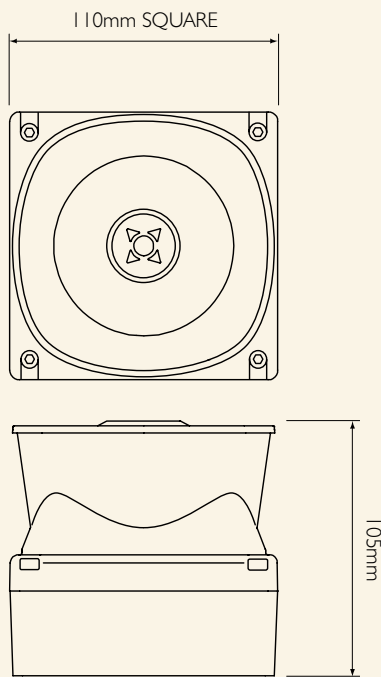

Specification

Voltage	9 - 28Vdc
Current	240mA at 24Vdc (tone 3)
Sound Output	114dB(A) at 28Vdc (tone 3) 120 dB(A) at 28Vdc (tone 6)
Temperature	- 25°C to + 70°C
Construction	ABS
IP Rating	IP66
Weight	0.68Kg
Tones	32
Colours	Red or White

The Symphoni High Output IP sounders are enhanced versions of the Symphoni HO that are constructed in an IP66 housing allowing use in external locations or environments where both high noise levels and moisture are present

- VERY HIGH OUTPUT
- PROTECTION TO IP66
- AUTOMATIC SYNCHRONISATION
- SWITCH SELECTABLE TONES
- VOLUME CONTROL
- SECOND TONE FOR TWO STAGE ALARMS

ASTEC B.V.

Kerkweg 70
6155 KN Puth (NL)
Tel.: +31 (0)46 443 55 77
Fax: +31 (0)46 443 04 82
E-mail: info@astec.nl
Internet: www.astec.nl