


The RoLP LX Wall base is ideal for dual use applications where a visual alarm device is required in addition to an audible alarm. Recommended for wall use and requiring just one installation point, the RoLP LX Wall is available to use with any standard RoLP sounder, including the high output RoLP Maxi sounder.



Technical Specification

Mounting Type	Wall
Voltage	18 – 28Vdc (Fire Use) 9 - 15 Vdc (Fire Use)
Current	22 – 37mA dependent on setting (Sounder and beacon; tone 3)
Coverage (y)	7.5m (Switchable to 2.5m)
Mounting Height (x)	2.4m (max)
Coverage Volume Code	W-2.4-7.5
Coverage Volume	135m ³ (15m ³)
Flash Rate	1Hz (Switchable to 0.5Hz)
Operating Temperature	-25°C - +70°C
Monitoring	Reverse Polarity
Protection	IP65
Weight	200g
Body Colour	White or Red
Flash Colour	White or Red
Sound Output	102dB(A) (Typical tone 3 – RoLP)

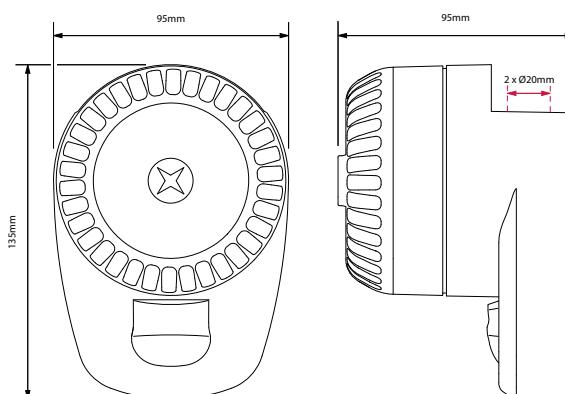

Features

- Ultra low current consumption
- RoLP and RoLP Maxi sounder options
- Up to 7.5m coverage volume (switchable to 2.5m)
- 0.5 or 1Hz flash rate

Benefits

- Use where current consumption is a key consideration
- Delivering up to 106dB(A) sound output
- Ideal for bedrooms, bathrooms and toilets
- Switch flash rate to 0.5Hz to reduce current consumption

Reference

ROLP/W1/LX-W/RF
 ROLP/R1/LX-W/RF
 ROLP/R1/LX-W/WF
 ROLPX/W1/LX-W/RF
 ROLPX/R1/LX-W/RF
 ROLPX/R1/LX-W/WF

Catalogue No.

8500024FULL-0024X
 8500025FULL-0025X
 8500023FULL-0023X
 8500029FULL-0029X
 8500030FULL-0030X
 8500028FULL-0028X

Description

RoLP LX Wall, Red Flash, White Body
 RoLP LX Wall, Red Flash, Red Body
 RoLP LX Wall, White Flash, Red Body
 RoLP Maxi LX Wall, Red Flash, White Body
 RoLP Maxi LX Wall, Red Flash, Red Body
 RoLP Maxi, LX Wall, White Flash, Red Body

For full list of part numbers, turn to page 61



Kerkweg 70
 6155 KN Puth (NL)
 Tel.: +31 (0)46 443 55 77
 Fax: +31 (0)46 443 04 82
 E-mail: info@astec.nl
 Internet: www.astec.nl