

Address range 1 – 240: automatic detectors / manual call points / modules

Automatic fire detectors

FI750/B
Detector base Series FI750



FI750/T
Heat detector parameterisable as:
Rate-of-rise heat detector A1R 58°
Maximum heat detector BS 78°



FI750/OT
Multi-criteria detector optical/thermal



FI750/O
Optical smoke detector




DECORLINE


16 special designs
• Series FI750
• Series FI720/RF
• Series FC650



Special detectors

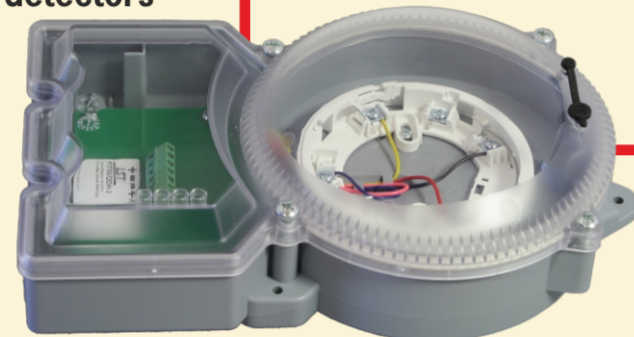

FI750/DDH-2
Duct detector housing
for smoke detector Series FI750

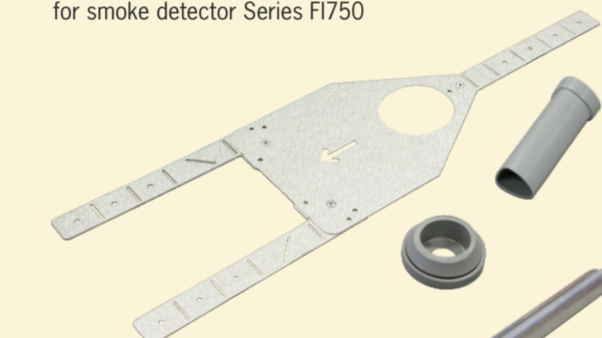

FI750/DDH-2/BRA
Duct detector bracket

FI750/DDH-2/TV-0,6 -1,5 -2,8
Duct detector pipe
Lengths: 0.6m – 1.5m – 2.8m

LIF601-1
LIFR601-1 (redundant)
Loop interface Series BC600

Manual call points



HME/3000/72/H1/01 MEP logo
HME/3000/72/H1/02 LST logo
Manual call points EN 54-11 type B



FI720/MCP
Manual call point EN 54-11 type A



HME/xxxx/72/zz/01 MEP logo
HME/xxxx/72/zz/02 LST logo
Manual call points in many versions
xxxx = colour, zz = labelling

Input and output modules

FI700/M1IN
Monitor module
1 input monitored



FI700/M1OUT
FI700/M1REL
Control modules
1 output monitored
1 relay output



FI700/M1IN1OUT
FI700/M1IN1REL
Combi modules
1 input monitored / 1 output monitored
1 input monitored / 1 relay output



FI700/M1CZ
Conventional zone module



FI700/MM1IN
Monitor module mini
1 input monitored



FI700/MM1OUT
FI700/MM1REL
Control modules mini
1 output monitored
1 relay output



FI700/MM1IN1OUT
FI700/MM1IN1REL
Combi modules mini
1 input monitored / 1 output monitored
1 input monitored / 1 relay output



FI750/PU
Programming unit for
detectors, manual call points
modules, signalling devices
• Series FI750
• Series FI700
• Series FC650



FI700/M4IN4REL
FI700/M4IN2OUT2REL
FI700/M6IN2REL
Combi modules
4 inputs monitored / 4 relay outputs
4 inputs monitored / 2 outputs monitored / 2 relay outputs
6 inputs monitored / 2 relay outputs



FI700/PA
Remote indicator



FI700/MBD/KO
Module box Series FI700



Conventional detectors


FC650/O
Optical smoke detector



FC650/TDIFF/57
Thermal RoR detector A1R 57°
FC650/TMAX/78
Thermal max detector BS 78°




FC600/BR
Detector base Series FC600/FC650



Wireless fire detection system FI720RF and FI700/RF



FI720/RF/CWE
RF expander conventional

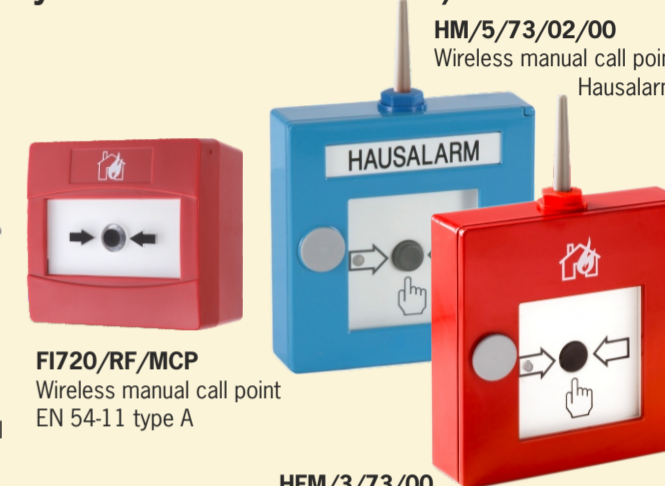


HFM/3/73/00
Wireless manual call point EN 54-11 type B



FI720/RF/W2W
RF interface
Loop connection



FI720/RF/WE
RF expander



FI700/RF/PA-2
RF remote indicator

FI720/RF/M/SST
Wireless control modul



FI720/RF/O
Optical smoke detector / RF



FI720/RF/OT
Optical-thermal detector / RF



FI720/RF/T
Thermal detector / RF



FI720/RF/WB/SOUW/STRC
Wireless base sounder-strobe 92dB, 32 tones



FI720/RF/WB/SOUW
Wireless base sounder
91dB, 32 tones



FI700/RF/M1REL/BATT
Wireless module / 1 relay output
Battery operation



Acoustic and optical signalling devices



FI750/WB/MT/SOUW
Base sounder 93dB, 32 tones



FI750/WB/MT/SOUW/STRC
Base sounder-strobe 93dB, 32 tones





FI750/WBRIS/SOUW
FI750/WBRIB/SOUW
Base sounder 93dB, 31 tones
Actuation via RI output of detector



FI750/WBRIS/SSTWCW
FI750/WBRIB/SSTWCW
FI750/WBRIB/SSTWCW
Base sounder-strobe 93dB, 31 tones
Actuation via RI output of detector

FI750/M/SST
Control module

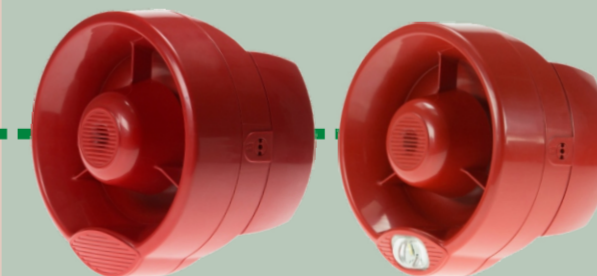

CWS/SOUR
CWS/SOUW
Sounder 100dB, 32 tones



CWS/SOUR/STRC
CWS/SOUW/STRC
Sounder 100dB, 32 tones